

APPLICATIONS

BOGIE

MOVING COLUMN MILLING CENTRE 30KCU-AR

Rotary table and fixed tables can be integrated in this type of machines.


This machine has the possibility of fitting different heads, i.e. automatic rotation with manual or automatic change (45° automatic head, 360.000 positions, quill, "L" shaped head, direct outlet head, etc.) being suitable for works in the railway sector, as the heads can be easily adapted to the internal area of the workpiece..



TECHNICAL CHARACTERISTICS

Longitudinal travel (X) (mm):	3.000 - 15.000
Cross travel (Y) (mm):	1.250 - 1.600*
Vertical travel (Z) (mm):	2.000-2.500*-3.000*-3.500*-4.000*
Rapid feed (mm/min):	20.000
Standard Head:	45° automatic (others on request)
Magazine (tools):	30 - 40* - 60* - 80*
Main motor power (kW):	40

*optional

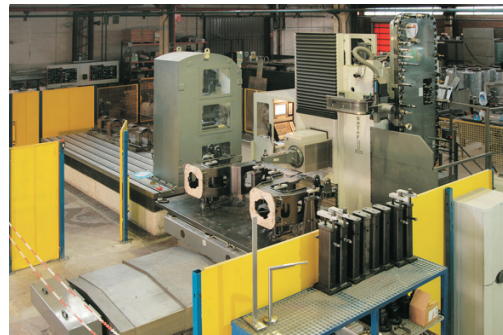

REFERENCES

- CAF
- FELGUERA RAIL
- TALGO

