


SHORT DRILL CHUCKS / PORTABROCAS INTEGRALES

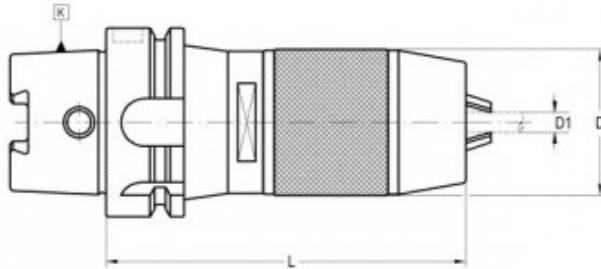

Balanced according to ISO 1940-1 up to 8.000 rpm.

Available in HSK, SK, BT, BT-DC, ISO 2080 tapers.

Equilibrado según ISO 1940-1 hasta 8000 rpm
Disponibles para conos HSK, SK, BT-DC,

